




rayolite[®]

Round Shoulder
Long-Life and Standard Reflectors

Rayolite Reflective Pavement Markers.
Designed To Endure The Rigors Of The Road.

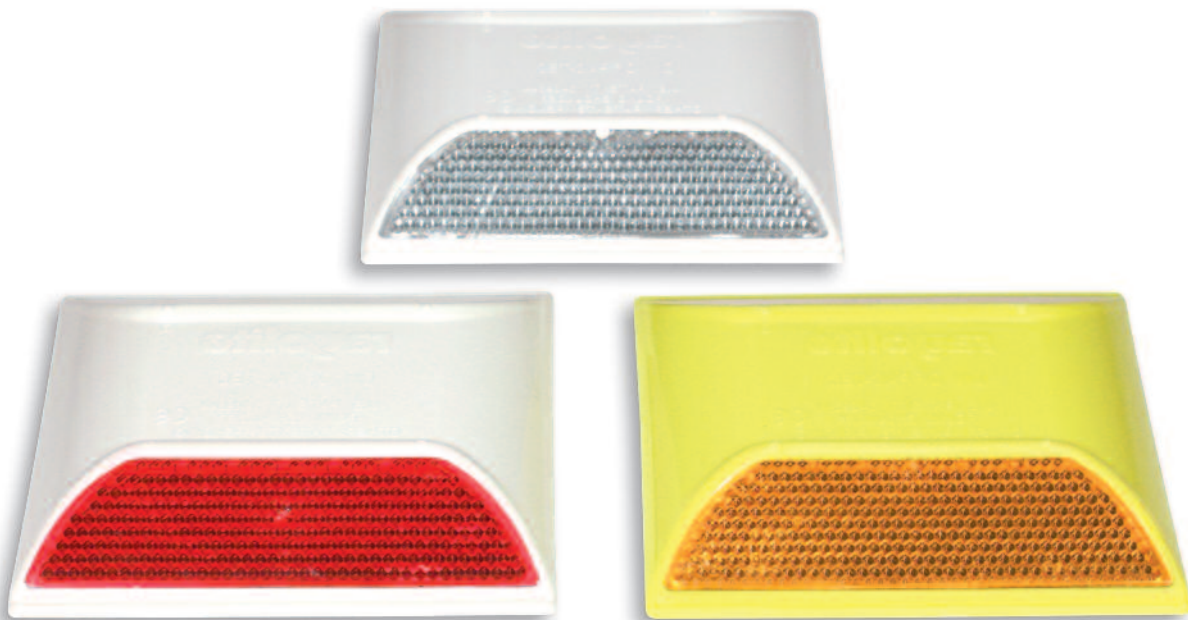



Designed For Safety. Engineered To Last.

How to Apply Markers

Prepare Surface Area

1. Clean & prime the surface area.
2. Prepare the surface by removing any loose materials from the road surface.

Apply Markers



Three Application Methods

1. Peel off the protective paper of the butyl pad (1A). Place marker on road surface and apply weight to secure marker to the surface (1B).
2. Apply epoxy to the bottom of the marker, spreading evenly.
3. Apply adequate amount of bituminous adhesive to the road surface (3A). Road surface should be dry. Place marker on the prepared road surface applying slight pressure until the marker contacts the road surface (3B) and forces a bead of epoxy or bituminous around all four corners (3C).

4500 N. Sam Houston Parkway W.
Building A, Suite 120
Houston, Texas 77086


Phone: (281) 617-2240
Toll Free: (800) 848-7025
Fax: (281) 583-1506

Round Shoulder Standard, Round Shoulder ARC Long-Life & Round Shoulder FH Long-Life Reflectors

The Round Shoulder Standard and Long-Life reflective pavement markers are designed to offer maximum strength, high-reflectivity and lower tire impact.

The brightly colored housing provides high visibility for daytime delineation. Improved smoothed edge shape reduces tire impact and increase its lifetime. Protective brow protects the top area of the lens from deterioration.

Round Shoulder ARC Long-Life and Round Shoulder FH Long-Life Reflectors have an abrasion resistance coating in chemically bonded to the lens surface to protect it from the grinding action of dirt, sand and contact from traffic volume. The Round Shoulder FH has an additional interior coating.

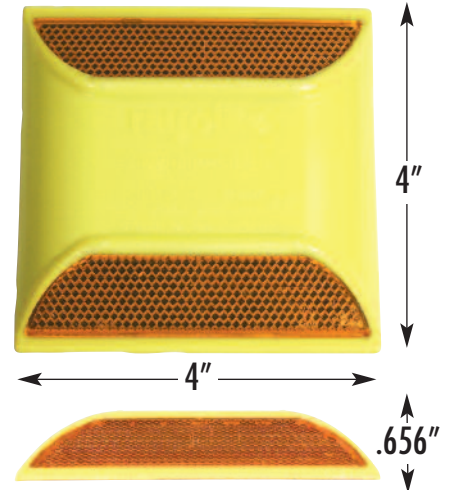

Specifications

Material: True Cube-Corner type Reflex Reflector, molded of optic grade Methyl Methacrylate (plastic)
Reflective Area: 2.86 sq. in.

Housing: Molded of high impact ABS compound for durability
Packed: 50 per carton
Weight: Approximate weight 23 lbs. per carton

Features	Round Shoulder	Round Shoulder ARC	Round Shoulder FH
Maximum Strength	✓	✓	✓
High-Reflectivity	✓	✓	✓
Reduces Tire Impact	✓	✓	✓
Smoothed Edge Shape	✓	✓	✓
High Visibility	✓	✓	✓
Protective Brow	✓	✓	✓
Abrasion Resistance Coating		✓	✓
Interior Coating			✓

Lens Type

Type B/RS2W Two-Way Clear	Type C/RSWR Clear and Red	Type D/RS2A Two-Way Amber	Type G/RS1W One-Way Clear	Type H/RS1A One-Way Amber
Type K/RS1R One-Way Red	Type DR/RS2R Two-Way Red	Type X/RSAR Amber and Red	Type Z/RSWA Clear and Amber	Type 2B/RS2B Two-Way Blue